DT2-WBC / DT2-B2 User Manual

DECK

2 Bays External Storage Enclosure

www.stardom.com.tw

Ver.1

12-3DT2000000

DECK

DT2-WBC / DT2-B2

User manual

Forewords

About this manual
Thank you for purchasing STARDOM products.
This manual will introduce the STARDOM DECKTANK Series of products. Before using your DECKTANK, please read this manual thoroughly.
Although all information contained in this user manual has been carefully verified before publishing, however, the actual product specification will be based on the time of delivery from STARDOM. Any updates to the product specifications or relevant information may be found on ***www.stardom.com.tw***. Products are subject to change without prior notifications.
If you have any questions regarding the products of STARDOM, or you would like to know the latest product information, user manual update, or firmware update, please contact your local supplier or visit ***www.stardom.com.tw*** for further information.

Copyright © RAIDON TECHNOLOGY, INC. All rights reserved.

Table of Contents

1. Package Contents and Product View
2. Hard Drive Requirements and Precautions
3. Hard Drive Status Indicator Definitions
4. Hardware Installation

1. Package Contents and Product View

Open the package and you should find the following :

DECKTANK DT2-WBC	DECKTANK DT2-B2
DECKTANK DT2-WBC x 1 with Removable drive tray enclosed x 2	DECKTANK DT2-B2 x 1 with Removable drive tray enclosed x 2
AC Power Cable x 1	AC Power Cable x 1
USB Cable x 1	USB Cable x 1
1394b Cable x 1	User's Manual x 1
User's Manual x 1	Accessory Kit x 2
Accessory Kit x 2	

Please make sure that the contents listed above are not damaged or missing. If you should find damages or missing contents, please contact your supplier immediately.

DT2-WBC Front View

1. Power indicator
2. Frontal USB2.0 extension port
3. Removable drive tray
4. Key hole
5. Hard drive status indicator
6. Frontal firewire400 extension port
7. Built-in USB2.0 multi-card reader

DT2-WBC Rear View

a. Power switch
b. Power socket
c. Fan
d. Anti-theft cord slot
e. USB2.0 interface connection
f. USB2.0 extension port
g. RAID mode switch
h. Firewire800 interface connection
i. Firewire/USB interface mode switch

DT2-B2 Front View

1. Power indicator
2. Frontal USB2.0 extension port
3. Removable drive tray
4. Key hole
5. Hard drive status indicator

DT2-B2 Rear View

a. Power switch
b. Power socket
c. Fan
d. Anti-theft cord slot
e. USB2.0 interface connection
f. USB2.0 extension port
g. RAID mode switch

2. Hard Drive Requirements and Precautions

1. Under the JBOD mode, DT2-B2/DT2-WBC allows you to install two hard drives of different models and capacities, however, we do recommend in using two hard drives of the same model specifications and brand.
2. Please make sure that the two hard drives are free from bad blocks or defects prior to installation in order to avoid system crashes or data loss.
3. It is strongly advised in deciding to either set to a RAID mode or JBOD mode (default) prior to using the DECKTANK.

⚠ **NOTE: Once the drive mode configuration has been completed, re-configuration using the same hard drives to set the drive mode will result in complete data loss.**

4. Connecting both the Firewire800 interface and the USB2.0 interface connections to your computer simultaneously and set the Firewire/USB interface mode switch to Firewire, you will then be able to store the data via the high-speed Firewire800 and use the multi-card reader, the USB2.0 extension port as well as the firewire400 extension port.

3. Hard Drive Status Indicator Definitions

1. When the hard drive status indicator is off, this means drive is not present.
2. When the hard drive status indicator lights on, this means the drive is present and is on idling.
3. When the hard drive status indicator is blinking, this means the drive is present and being accessed for operation.

4. Hardware Installation

Please follow the instructions below to complete the hardware installation

Step1 : Open the package and take out the product making sure that all the enclosed contents are not damaged or missing. Should you find damages or missing contents, please contact your supplier immediately.

Step2 : Please place the system on a stable surface. Ensure that it is well ventilated without blockage to the vent and kept away from locations near water or where the product may become vulnerable resulting in damages.

Step3 : Mount your hard drives onto the removable drive tray and secure it with the screws enclosed in the accessory kit to avoid any damage to the hard drive due to accidental movements.

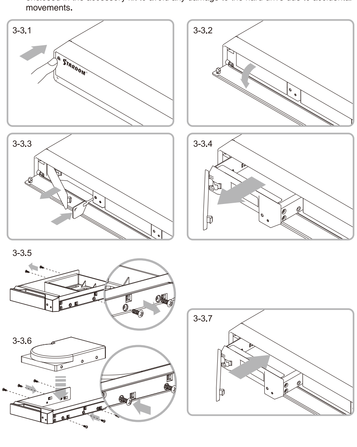

Step4 : When the hard drive installation has been completed, insert the hard drive tray into the system horizontally and push the latch into place.

Step5 : Use the provided cables to connect your computer to the relative port(s) on the DECKTANK.

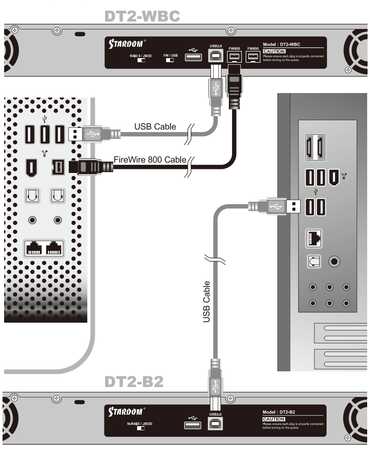

When your computer has booted, your operating system should recognize the hard drive(s) automatically. After the hard drive(s) has been successfully recognized, please follow the formatting of hard drive instructions given by the operating system. Once the formatting of the hard drive(s) has been completed, the hard drive is ready for use.